


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 11 TOWNSHIP 14 RANGE 4
DATE: -6-1-00- 4-4-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 7-29-99

IN. S.P.C. E ZONE NAD '83
NAME: 14041104
N: 491358.9019(m)
E: 65950.7307(m)

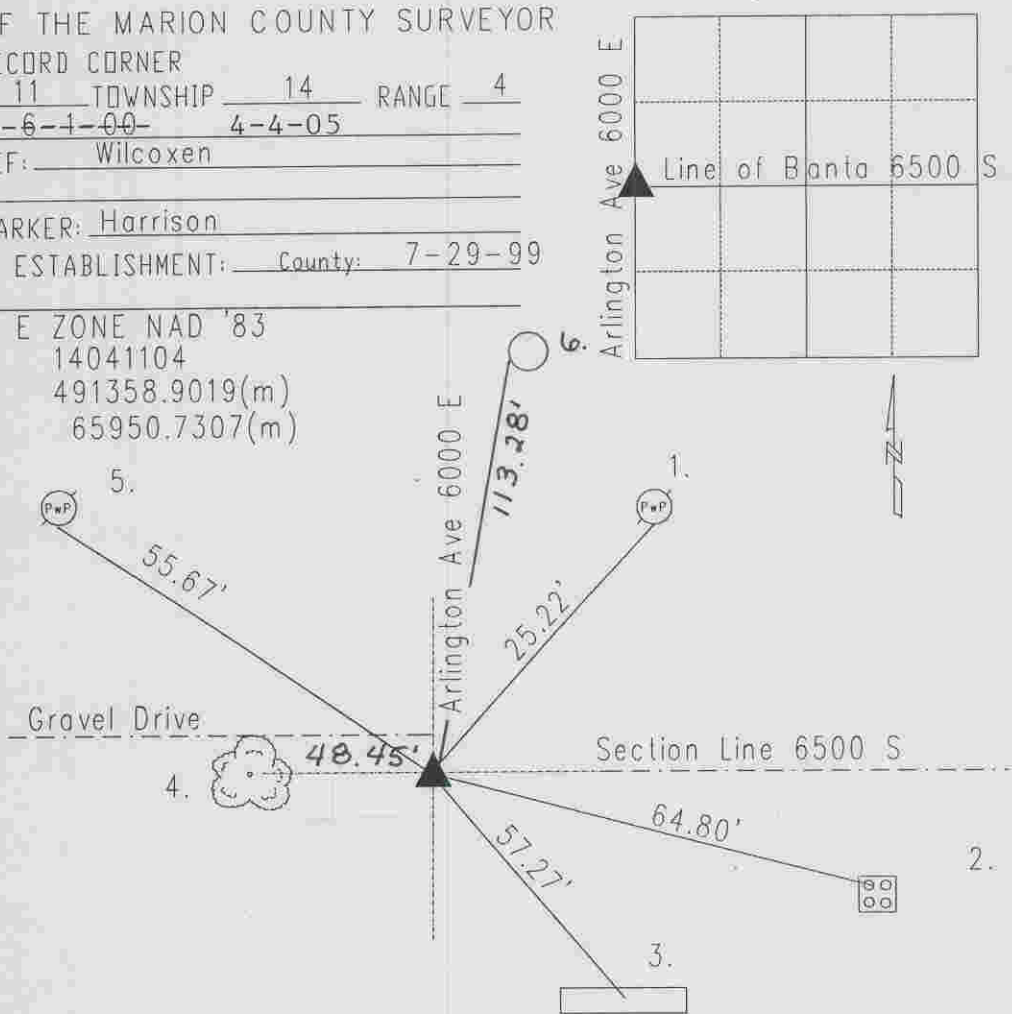

Original post set 1820 by Hendricks with witnesses: 15" beech N 25 W 15 links; 10" dogwood S 24 E 25 links per Marion County Atlas pg. 9. Hosbrook 3-30-1852 indicates no stone but witness: 28" beech N 82 W 34 links; 14" beech N 34 E 24 links per Franklin Township Legal Survey Book pg. 21. Hosbrook 2-28-1859 indicates set rock w/witness: 12" beech N 51 W 70 links per Franklin....pg.19. MCSO 1948 called iron pin over stone. Monroe 11-10-52 called stone. Monroe 7-9-58 called pipe over stone. McLand. 4-14-70 called brass plug in concrete. Wilcoxon 7-12-75 called same. Wilcoxon 1-11-83 called same. Wilcoxon 8-7-84 called PK nail set. Greene 9-15-88 called same. Wilcoxon '9-29-94 called same. Kiste 7-29-99 called PK nail. Excavated by Wilcoxon 6-1-00 brass plug fd 12" dn. Harrison set.

14041104

REF.	DISTANCE	DESCRIPTION
1.	25.22'	Road nail S PwP#42-736 10"up
2.	64.80'	Found bolt NW corner of flag pole base
3.	57.27'	Found cut 'x' in concrete headwall
4.	48.45'	Due W to (Found railroad spike S 30" maple) 12"up
5.	55.67'	PK nail SW PwP#2-735B 6"up
6.	113.28'	Road nail W PwP#40-736 18"up